

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)


PCT

(10) International Publication Number
WO 03/083179 A1

- (51) International Patent Classification⁷: **C25C 7/04**
- (21) International Application Number: PCT/FI03/00215
- (22) International Filing Date: 20 March 2003 (20.03.2003)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:
20020635 3 April 2002 (03.04.2002) FI
- (71) Applicant (for all designated States except US): **OUTOKUMPU OYJ** [FI/FI]; Riihitontuntie 7, FIN-02200 Espoo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KIVISTÖ, Tuomo** [FI/FI]; Hirsalantie 259, FIN-02420 Jorvas (FI). **MARTILA, Tom** [FI/FI]; Verkkokuja 7 B, FIN-02230 Espoo (FI).
- (74) Agent: **OUTOKUMPU OYJ**; Intellectual Property Management, P.O. Box 27, FIN-02201 Espoo (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declarations under Rule 4.17:**
— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

[Continued on next page]

(54) Title: TRANSFER AND INSULATION DEVICE FOR ELECTROLYSIS

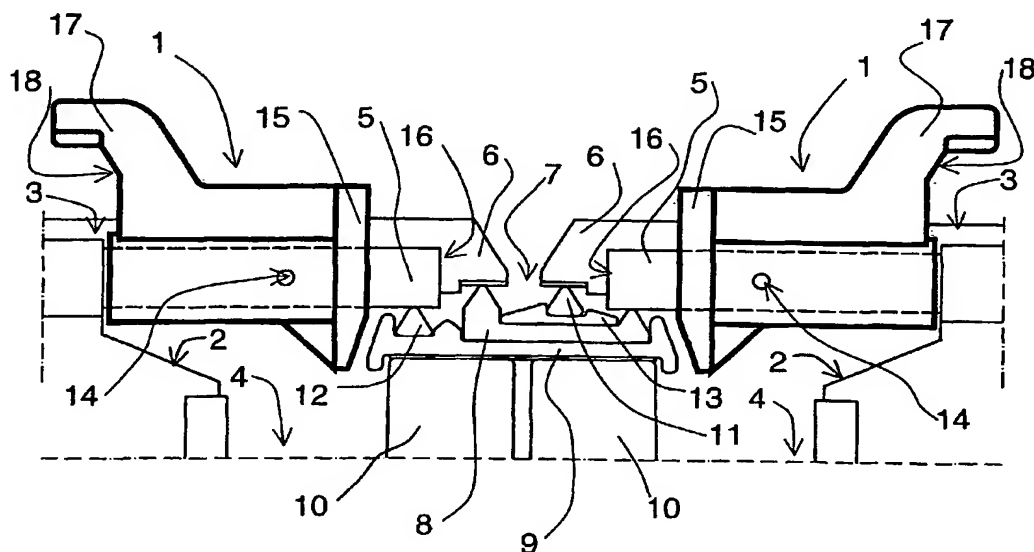

(57) Abstract: The invention relates to a transfer and insulation device (1) for electrically insulating electrodes, particularly anodes (2) and cathodes (3), used in the electrolytic cleaning of metals, from each other in an electrolytic tank (4), for distributing the electrodes as they are hanging in the electrolytic tank and for enabling the electrodes to be transferred, said transfer and insulation device (1) being made of one single piece.



KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TRANSFER AND INSULATION DEVICE FOR ELECTROLYSIS

The invention relates to a transfer and insulation device, defined in the preamble of claim 1, for electrically insulating electrodes, particularly anodes
5 and cathodes, used in the electrolytic cleaning of metals in the electrolytic tank, for distributing electrodes as they are hanging in the electrolytic tank and for enabling the electrodes to be transferred.

In an electrolytic plant meant for electrolytically cleaning metals such as copper,
10 zinc and nickel, there is typically a large number of electrolytic tanks that are in groups connected in series, so that the anode of the preceding tank is electrically connected to the cathode of the next tank by means of a highly electroconductive conductor rail that is placed on the wall between the tanks and is generally made of copper. This coupling is called a walker system. Said
15 structure typically also includes a notched insulation rail placed on the conductor rail, which insulation rail separates the cathode of the preceding tank from the conductor rail of the anode of the next tank. Without said insulation, all electrodes of all tanks would be electrically connected, and current would not pass through the electrolyte.

20

The anodes and cathodes serving as electrodes are placed in an alternating fashion in the electrolytic tank. In order to perform the electrolytic cleaning in an advantageous way, the electrodes are placed as near to each other as possible, and consequently the mutual positioning of the electrodes must be
25 carried out carefully in order to avoid short circuits. In connection with loading in the tank, separate loading elements approach the tank walls and the conductor rails resting on the tank together with their insulations, so that even small errors in the movements of a loading element may damage the tanks, the conductor rails or the insulations. Therefore the gripping spot of the electrodes should be
30 such that the loading element could grip it as easily as possible, and that the chances for erroneous movements would be minimized.

A known way to arrange the distribution of electrodes in the tank is either to provide the electrode supporting elements with nothing on the side by which they are placed on the conductor rail, or by notching the conductor rail so that the supporting elements supporting the electrode are set in notches provided
5 for them. One possibility is to arrange the distribution of electrodes by notching the insulation rail provided in connection with the conductor rails. By notching the structures where the electrodes are hanging, it is also possible to prevent contacts between adjacent electrodes.

10 When electrodes are lifted from the tank in order to change their position, the electrodes are generally gripped at the notchings made underneath the support elements thereof, by means of the hooks of a transfer arrangement, such as a crane. Generally the support elements are also provided with separate transfer lugs that are gripped by the lifting hook of the transfer arrangement.

15

For instance from the US patent 3,682,809 there is known a conductor rail arrangement where the conductor rail is uniform in structure, and the support elements supporting the electrodes are notched on the side where they are set on the conductor rails.

20

The prior art solutions have following drawbacks. The manufacturing of a notched conductor rail, generally extending over the whole tank, is expensive. On the other hand, if the employed rail is not notched, the electrodes are set in an inclined position owing to the insulation rail. Also the manufacturing of
25 notched electrodes is expensive, and when immersing them in the tank, they must be lowered at exactly the right spot with respect to the conductor rail, when seen in the transversal direction of the tank. This requires extraordinary precision of the transfer operation. Owing to the notched insulation rail and possibly also owing to the conductor rail, the electrodes must be lowered in the
30 tank at exactly the right spot with respect to the conductor rail, in order to make the electric contacts and separations to be correctly created. A possible heat extension of the conductor rail may cause problems while using an automatic

crane, because when replacing electrodes, the heat extension of a conductor rail may shift the electrode positions, i.e. the notches. If a notched conductor rail is used, the electrode distribution cannot be changed without replacing all conductor rails and insulation rails. Because of the notched insulation rail, in
5 practice the cleaning of the conductor rail always requires that the insulation rail is removed for the duration of the cleaning. This makes cleaning, particularly mechanized cleaning, more difficult. A notched rail must be made relatively thin, wherefore it generally becomes fairly weak and short-lived.

10 The object of the present invention is to introduce a novel arrangement for electrically insulating electrodes, particularly anodes and cathodes, from each other in an electrolytic tank, for distributing anodes and cathodes in an electrolytic tank and for enabling the electrodes to be transferred. In particular, the object of the invention is to combine the aforementioned functions in one
15 and the same piece.

The invention is characterized by what is set forth in the characterizing part of claim 1. Other preferred embodiments of the invention are characterized by what is set forth in the other claims.

20

Remarkable advantages are achieved by the transfer and insulation device according to the invention. According to the invention, by means of a device made of one single piece, the electrodes, particularly anodes and cathodes, used in the electrolytic cleaning of metals are advantageously electrically
25 insulated from each other in one and the same electrolytic tank, and the adjacent anodes and cathodes are distributed evenly as they are hanging in connection with the conductor rail structure of the electrolytic tank. In addition, the electrodes are transferred by means of a gripping lug provided in the device. Advantageously the device according to the invention is made of a
30 chemically resistant and heat-resistant insulating material, such as plastic, which makes it possible to be used in electrolysis. The device is manufactured for instance by pressurized casting.

The transfer and insulating device according to the invention is advantageously arranged in connection with the anode suspension rod. The transfer and insulation device is attached by fastening elements, such as locking pins, to the fastening point of the anode rod. Advantageously at both ends of the anode suspension rod, there is installed one transfer and insulation device so that each separate device is located at an equal distance from the tank wall. In the transversal direction, the transfer and insulation device only extends to a part of the anode width. The anode suspension rod is partly surrounded by the device, in which case the fastening element fastening the device passes, in the lengthwise direction of the tank, through both the suspension rod and the transfer and insulation device. The anode hangs in the conductor rail structure, suspended by the suspension rod.

Advantageously the transfer and insulation device is designed so that it is easy to grip by a transfer hook of the electrode transfer device or by a corresponding transfer element. The device includes a grip lug, and the anode is advantageously lifted and lowered without swinging, when it is gripped at said lug. Advantageously the device is placed so that the grip lug is oriented towards the center part of the anode, so that the transfer hooks of the transfer arrangement are easily attached at the lugs. The grip lug is provided with an inclined part that helps the crane transfer hook to slip in the right spot in the grip lug, so that the lifting of the electrode is carried out successfully. Separate transfer lugs conventionally made in anodes are replaced by grip lugs provided in the device according to the invention.

In order to avoid short circuits, adjacent anodes and cathodes must not get into contact in the tank. The distribution element of the device advantageously prevents the anodes and cathodes from touching each other in the tank, and it distributes the electrodes at even distances and at the same height in the tank. Thus it is unnecessary to provide notches in the conductor rail structure in order to ensure that the electrodes are placed equidistantly. When lowering an anode

in the tank, in case of a possible erroneous movement in the sideways direction, the end of the suspension rod is prevented from touching the electroconductive rail or support element of the adjacent electrode, because the distribution element of the device first touches the tank wall and thus prevents the end from touching the rail. Remarkable savings in the expenses of the electrolytic process are achieved by using the transfer and insulation device according to the invention, and automatic transfer processes of the electrodes are made much easier. By means of the device according to the invention, a device made of one single piece is provided with several functions that earlier were replaced for example by notching the conductor rail structure and by providing the anodes with lifting lugs. Advantageously the device is designed so that when lowering a cathode beside an anode, any mutual contact between them is prevented.

The invention is described in more detail below with reference the appended drawings.

Figure 1 A cross-sectional illustration showing adjacent electrolytic tanks and a transfer and insulation device according to the invention.

Figure 2 A cross-sectional illustration of a transfer and insulation device according to the invention.

According to figure 1, the anodes 2 and cathodes 3 are lowered into electrolytic tanks 4, of which only two adjacent tanks are illustrated. In reality, an electrolytic process includes a large number of adjacent tanks, where similar structures are repeated. According to the drawing, the anodes 2 and cathodes 3 are placed in the tank 4 in succession, in an alternating order, in the lengthwise direction of the tank. The drawing shows first an anode at the front, and behind the anode, a cathode that is located further up. Both the anodes and the cathodes are suspended, by means of their suspension rods 5 and 6, in conductor rail structures 7 placed on top of the walls 10 of the electrolytic tank 4. The conductor rail structure comprises a conductor rail 8 extending over

the whole length of the tank in order to electrically connect the anode and the cathode of adjacent tanks, and an insulation sheet 9 of the same length as the tank, placed between the conductor rail and the wall 10. In addition, the structure 7 comprises support elements 11 and 12 for those electrodes that are not connected to the conductor rail 8, and an insulation profile 13 in order to insulate the other support element from the conductor rail.

The transfer and insulation device 1 illustrated in figure 1 is at the fastening point 14 attached at both ends of the suspension rod 5 of the anode 2 by means of a locking pin or the like, so that the locking pin passes through the suspension rod and the device in the lengthwise direction of the tank. Only one end of the anode and the cathode is illustrated in figure 1. When the transfer and insulation device is placed in the anode 2, its suspension rod 5 passes through the device 1. The transfer and insulation devices are arranged at the anode ends, so that they are located equidistantly from the tank walls 10, and that the device extends to only a part of the width of the anode 2. When lowering an anode into the tank 4, the distribution element 15 may touch the tank wall, but in any case the end 16 of the suspension rod 5 is prevented from touching the electroconductive rail or support element of the adjacent electrode. The grip lug 17 of the device extends towards the middle part of the tank, and the inclined part 18 thereof helps the transfer element hook to find the right spot when gripping the anode in order to transfer it.

Figure 2 is a cross-sectional illustration of figure 1 and shows two adjacent transfer and insulation devices 1 according to the invention when seen from the side. According to figure 2, seen from the grip lug 17 down to the distribution element 15, the transfer and insulation device 1 is straight in form, but it may as well be round or angular. As is seen in figure 2, the distribution element 15 of the device 1 prevents adjacent electrodes from touching each other in the tank and distributes the electrodes evenly and at the same height as they are hanging in the tank. The suspension rods 6 of the cathodes remain between

the distribution elements 15, and the suspension rods 5 of the anodes pass through the transfer and insulation device 1.

For a man skilled in the art, it is obvious that the various embodiments of the
5 invention are not restricted to the above described examples only, but may vary within the appended claims.

CLAIMS

1. A transfer and insulation device (1) for electrically insulating electrodes, particularly anodes (2) and cathodes (3), used in the electrolytic cleaning of metals, from each other in an electrolytic tank (4), for distributing the electrodes as they are hanging in the electrolytic tank and for enabling the electrodes to be transferred, **characterized** in that the transfer and insulation device (1) is made of one single piece.
2. A transfer and insulation device according to claim 1, **characterized** in that the transfer and insulation device (1) is made of a chemically resistant and insulating material.
3. A transfer and insulation device according to claim 1 or 2, **characterized** in that the transfer and insulation device (1) is made of plastic.
4. A transfer and insulation device according to claim 1 – 3, **characterized** in that the transfer and insulation device (1) is attached to the suspension rod (5) of the anode (2), one on both sides of the anode, essentially at an equal distance from the wall (10) of the electrolytic tank (4).
5. A transfer and insulation device according to claim 4, **characterized** in that the anode suspension rod (5) has a fastening point (14) for fastening the transfer and insulation device (1).
6. A transfer and insulation device according to claim 4 or 5, **characterized** in that the transfer and insulation device (1) surrounds part of the anode suspension rod (5).

7. A transfer and insulation device according to claim 1 – 6, **characterized** in that the transfer and insulation device (1) only extends over a part of the width of the anode (2).
- 5 8. A transfer and insulation device according to claim 1 – 7, **characterized** in that the transfer and insulation device (1) is provided with a grip lug (17) for enabling the electrode to be transferred.
- 10 9. A transfer and insulation device according to claim 8, **characterized** in that the device is arranged in the suspension rod (5) of the anode (2) so that the grip lug (17) extends towards the middle part of the anode.
- 15 10. A transfer and insulation device according to claim 8 or 9, **characterized** in that the grip lug (17) is provided with an inclined part (18) for adjusting the position of the gripping hooks transferring the electrode.
- 20 11. A transfer and insulation device according to claim 1 – 10, **characterized** in that the transfer and insulation device (1) includes a distribution element (15) for insulating adjacent electrodes from each other.

1/2

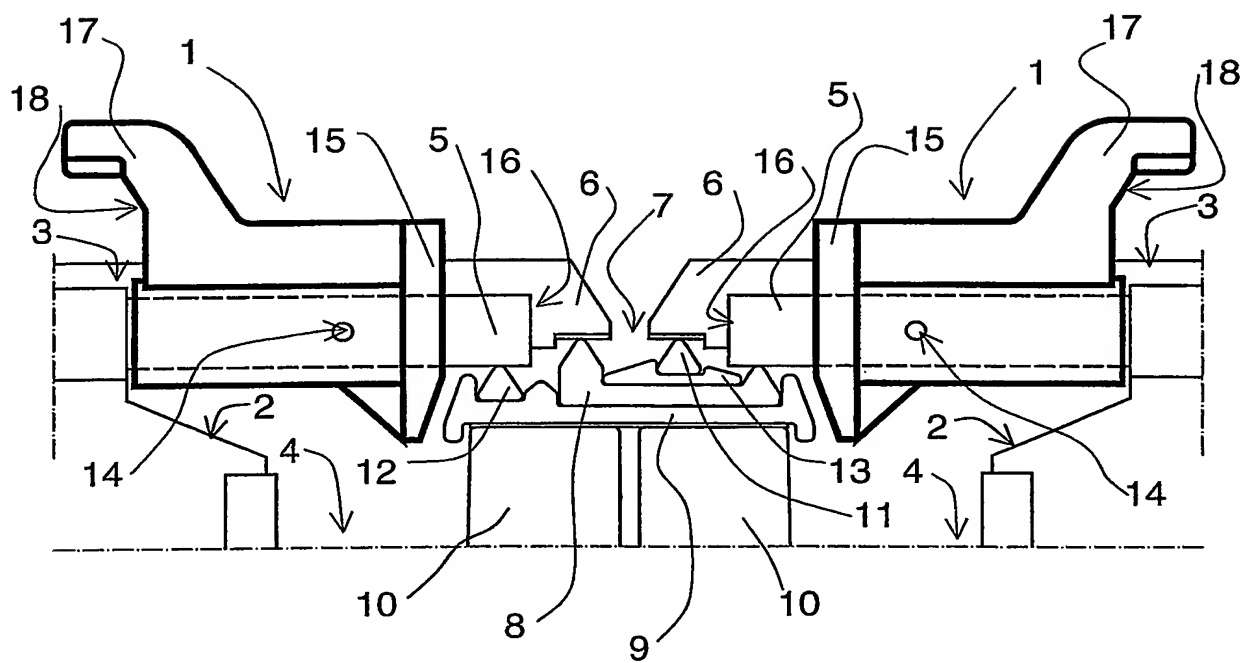


Fig. 1

2/2

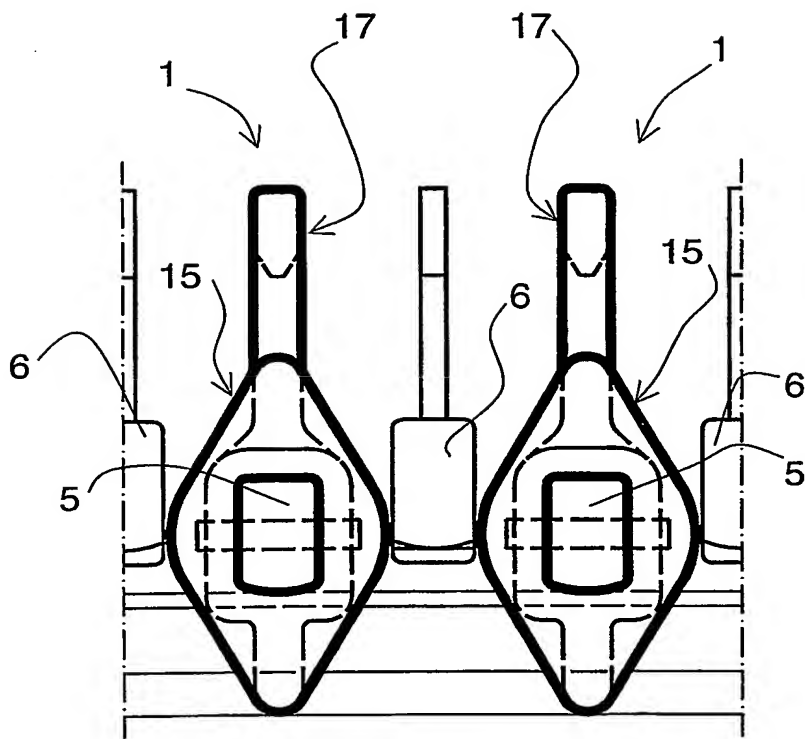


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00215

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: C25C 7/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: C25C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI DATA, EPO-INTERNAL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3997421 A (ROLAND PERRI ET AL), 14 December 1976 (14.12.76), figure 1, abstract --	1-11
A	US 4619751 A (DOUGLAS J. ROBINSON), 28 October 1986 (28.10.86), figure 1, abstract --	1-11
A	US 4279731 A (ALBERTO PELLEGRINI), 21 July 1981 (21.07.81), figure 3, abstract --	1-11
A	US 5002642 A (KOICHI KANEKO ET AL), 26 March 1991 (26.03.91), figures 1A,2, abstract --	1-11

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 25 June 2003	Date of mailing of the international search report 30 -06- 2003
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Ulrika Nilsson/MP Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/06/03

International application No.

PCT/FI 03/00215

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	3997421	A	14/12/76	NONE	
US	4619751	A	28/10/86	NONE	
US	4279731	A	21/07/81	AR 227296 A	15/10/82
				AT 44554 T	15/07/89
				AU 532517 B	06/10/83
				AU 6479780 A	02/07/81
				BR 8007570 A	02/06/81
				CA 1169808 A	26/06/84
				CS 223889 B	25/11/83
				DD 154831 A	21/04/82
				DE 3072159 D	00/00/00
				EP 0031897 A,B	15/07/81
				SE 0031897 T3	
				EP 0111149 A	20/06/84
				ES 497263 A	16/12/81
				ES 505339 A	01/10/82
				ES 8201638 A	16/03/82
				ES 8300144 A	01/01/83
				FI 67728 B,C	31/01/85
				FI 803655 A	30/05/81
				HU 183256 B	28/04/84
				IT 1163737 B	08/04/87
				IT 7927690 D	00/00/00
				JP 1301957 C	14/02/86
				JP 1372372 C	07/04/87
				JP 1592189 C	14/12/90
				JP 56102586 A	17/08/81
				JP 57203783 A	14/12/82
				JP 60024186 B	11/06/85
				JP 61037355 B	23/08/86
				JP 61096093 A	14/05/86
				JP 63015354 B	04/04/88
				MX 148530 A	29/04/83
				NO 157383 B,C	30/11/87
				NO 803330 A	01/06/81
				PL 132356 B	28/02/85
				PL 228167 A	18/09/81
				RO 81392 A	29/04/83
				SU 1126210 A	23/11/84
				US 4389298 A	21/06/83
				US 4417960 A	29/11/83
				US 4425214 A	10/01/84
				US 4518113 A	21/05/85
				YU 42544 B	31/10/88
				YU 302380 A	28/02/83
				ZA 8006648 A	25/11/81

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/06/03

International application No.

PCT/FI 03/00215

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	5002642	A	26/03/91	AU 595996 B	12/04/90
				AU 625401 B	09/07/92
				AU 1443088 A	03/11/88
				AU 4903990 A	24/05/90
				CA 1329382 A	10/05/94
				DE 3881933 A,T	29/07/93
				EP 0286093 A,B	12/10/88
				FI 87659 B,C	30/10/92
				FI 881677 A	11/10/88
				JP 1987236 C	08/11/95
				JP 7013315 B	15/02/95
				JP 63255386 A	21/10/88
				KR 9402259 B	19/03/94
				JP 2028530 C	19/03/96
				JP 7068628 B	26/07/95
				JP 63262494 A	28/10/88
				JP 1011989 A	17/01/89
				JP 2028539 C	19/03/96
				JP 7068629 B	26/07/95